

Hear more
deeply and
feel more
connected
to music than
ever before

XLOTM
MADE IN USA

XLO EUROPE
www.xloelectric.eu
info@xloelectric.eu

XLOTM

XLOTM

TM and © 2017. XLO International, Inc.
All rights reserved.
Markham, Ontario, Canada L3R 4L9



Signature 3TM

High Stability IT-certified 105° PVC Insulation

Double-Sided Copper Foil Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Shielded High Density PVC-CC Copper Braided Shield

Copper Foil Shield
Multi-Layered
Laboratory Grade
Copper Conductors

Double-Sided Copper Foil Shield

Shielded High Density PVC-CC Copper Braided Shield

High Stability IT-certified 105° PVC Insulation

Sounds Like Nothing At All™

Signature 3™

XLO's updated Signature 3™ Integrated Field-Balanced™ surface/diving "exoskeleton" winding technique minimizes frequency-related phase-shift as no conductor has a "normal" position within the grouping allowing XLO cables to work better with a greater number of components. But no one buys cable for the technical specifications, they just want their system to sound better! And XLO Signature 3 allows you to hear more deeply and feel more connected to music than ever before.

S3 Cable Design

- Integrated Field-Balanced™ surface/diving winding geometry
- UP-OCC laboratory-grade copper conductors
- Ultra-low capacitance Aerospace-Grade PTFE (Polytetrafluoroethylene) dielectric insulation
- Precision-machined connectors with 24K mil-spec gold-plated contacts


S3-1 Single-Ended Audio Interconnect



S3-2 Balanced Audio Interconnect



S2-3 Shielded Phono Cable

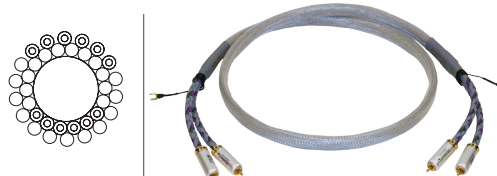

Also available in DIN to RCA for Tone Arm cables

S3-4 75 Ohm Coaxial Digital Cable



S3-4B 110 Ohm AES/EBU Balanced Digital Cable



S3-5.2 Speaker Cable



Available with Banana plugs, 6.0 mm or 8.0 mm Spades

S3-5.4SG Shotgun Speaker Cable



Available with Banana plugs, 6.0 mm or 8.0 mm Spades

S3-5.4BW Bi-Wire Speaker Cable



Available with Banana plugs, 6.0 mm or 8.0 mm Spades

S3-10 AC Power Cable



Available with NEMA, Schuko, UK or Swiss AC plugs and 1.5A or 20A IEC